Small-scale online simulations in guided-wave photonics

Manfred Hammer*

Theoretical Electrical Engineering, Paderborn University, Paderborn, Germany

1 Online dissemination of academic simulation tools

Current mobile devices provide a computing power that is comparable to the supercomputers of two decades ago. Hence, it should be possible to harness those facilities for highly advanced physical simulations, by the standards of 2000, even if things appear merely small-scale today. With HTML5 and JavaScript, recent years have seen some standardization in the encoding of web-pages and of active content, such that it now seems worthwhile to devote effort to the realization of projects for specialized scientific audiences. We illustrate this approach with a series of quasi-analytical solvers [1] for typical problems in guided wave photonics. The solvers are embedded in HTML-pages, with a user-interface encoded in JavaScript, including graphics facilities (inline SVG). For the actual core computations, reasonably mature C++-sources exist. With a respective tool [2] these are *compiled* to JavaScript, and thus become directly available for the online computations. When comparing simulations carried out in a web-browser running the JavaScript code with a native program, where the respective C++-sources where compiled (gcc) and executed on the same desktop machine, we observed penalty factors below 3 in computational time.

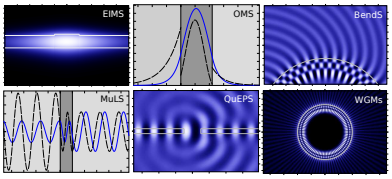

On the one hand, in a context of scientific simulations, this environment has certain shortcomings, mostly related to the particularities of the program language, and to security restrictions required for external web pages. On the other hand, all the burdens (compatibility, installation, distribution) that otherwise might prevent the use of an academic simulation tool by "others" are entirely absent. Our solvers have proven to be particularly useful for purposes of demonstration and teaching, but also for other tasks in integrated photonics design.

2 Scientific simulations based on HTML5 / JavaScript

OMS, EIMS, MuLS, QuEPS, BendS, WGMs.

JavaScript

. . . with a view to scientific simulations:
- an untyped language,
- interpreted code,
- single thread,
- local access restricted,
- intended to be error-tolerant.

. . . but:
- typed arrays,
- AOT/JIT compilation,
- web workers,
- prompts,
- browser & other tools.

Core computations

Existing C++ code [3]

↓ emscripten (translation via LLVM to asm.js)

JavaScript (module.js)

asm.js ⊂ JavaScript,
- enables optimization,
- pre-compiled,
- evolving (WebAssembly).

Script/browser vs. native C++: time penalty **2.7** (QuEPS), **2.9** (BendS), **2.5** (WGMs).

3 MuLS

Oblique incidence of plane waves on dielectric multilayer stacks



$\sim \exp(\mathrm{i}\omega t)$, $\partial_y = 0$, 2-D TE/TM,

$\begin{pmatrix} E \\ H \end{pmatrix}(x,z) = \boldsymbol{\phi}(x)\,\exp(-\mathrm{i}k_{1,z}z)$, $k_{1,z} = kn_1\sin\theta_1$,

$\partial_x^2\phi + (k^2n^2 - k_{1,z}^2)\phi = 0$

scattering problem ⇝ ϕ.

A Bragg-resonator,

19 interior layers, normal incidence $\theta_1 = 0°$, target wavelength $\lambda = 1.55\,\mu$m, refractive indices $n = 1, 2, 1, 2, \ldots, 2, 1$, quarter-wave thicknesses $t_l = \lambda/(4n_l)$, central cavity layer $t_{10} = \lambda/(2n_{10})$.

Plots: transmittance T and reflectance R versus wavelength λ, field profiles E_y at $\lambda = 1.55\,\mu$m, at resonance, and at $\lambda = 1.7\,\mu$m, off-resonance, in the reflectance bandgap.

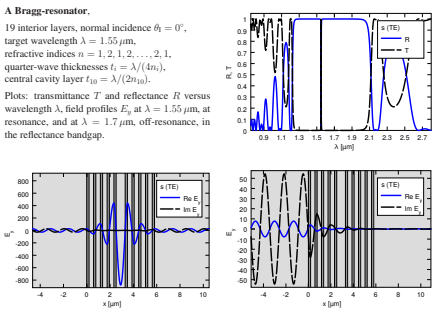

4 OMS

1-D mode solver for dielectric multilayer slab waveguides



$\sim \exp(\mathrm{i}\omega t)$, $\partial_y = 0$, 2-D TE/TM,

$\begin{pmatrix} E \\ H \end{pmatrix}(x,z) = \boldsymbol{\phi}(x)\,\exp(-\mathrm{i}\beta z)$, $\beta = kN_{\mathrm{eff}}$,

$\partial_x^2\phi + (k^2n^2 - \beta^2)\phi = 0$

eigenvalue problem ⇝ β, ϕ.

A standard Si/SiO$_2$ slab waveguide,

air cladding, vacuum wavelength $\lambda = 1.55\,\mu$m, refractive indices $n = 1.45, 3.45, 1.0$.

Plots: effective indices N_{eff} of guided modes versus the thickness t_1 of the core layer, fundamental and first order modes for a layer of thickness $t_1 = 0.44\,\mu$m, principal components E_y and H_y of TE- and TM-modes, respectively.

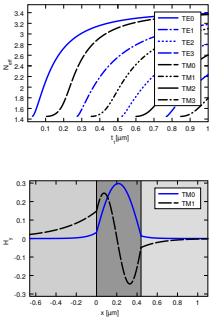

5 EIMS

2-D multilayer waveguide mode solver, variational effective index approximation

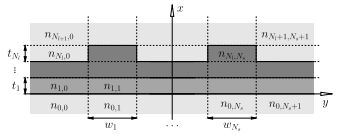

$\sim \exp(\mathrm{i}\omega t)$, $\partial_z n = 0$, $(\boldsymbol{E},\boldsymbol{H})(x,y,z) = \boldsymbol{\phi}(x,y)\,\exp(-\mathrm{i}\beta z)$, $\beta = kN_{\mathrm{eff}}$,

variational effective index approximation [4, 5]; semivectorial, separable components

eigenvalue problem ⇝ $\approx \beta, \approx \boldsymbol{\phi}$.

Coupler of two rib waveguides,

shallow ribs with thicknesses $t_1 = 0.5\,\mu$m, $t_2 = 0.05\,\mu$m, of widths $w_1 = w_3 = 1\,\mu$m, at a distance of $w_2 = 3\,\mu$m, refractive index contrast $1.45 : 1.99 : 1.0$. At wavelength $\lambda = 1.55\,\mu$m, the VEIMS solver [4, 5] identifies two quasi-TE-modes with effective indices $N_{\mathrm{eff}} = 1.77202$ (TE$_{0,0}$) and $N_{\mathrm{eff}} = 1.76965$ (TE$_{0,1}$), and thus predicts a coupling length $L_c = 328\,\mu$m.

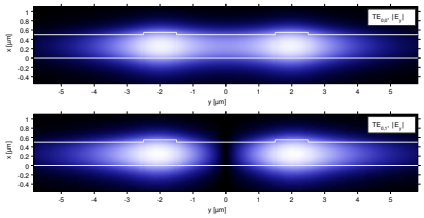

6 QuEPS

2-D frequency domain solver for rectangular optical guided-wave scattering problems



$\sim \exp(\mathrm{i}\omega t)$, $\partial_y = 0$, 2-D TE/TM,

$\partial_x^2\phi + \partial_z^2\phi + k^2n^2\phi = 0$

scattering problem ⇝ ϕ.

Facet of a slab waveguide,

a Si$_3$N$_4$-core ($n = 1.99$) of thickness $t_1 = 0.3\,\mu$m surrounded by SiO$_2$ ($n = 1.45$). Incidence of the guided TE$_0$-wave at vacuum wavelength $\lambda = 1.55\,\mu$m leads to about 2% reflectance.

QUEP-computation [6] with 124×133 spectral terms, $(x_t - x_b) \times (z_t - z_l) = 9.6 \times 10.3\,\mu\mathrm{m}^2$.

Plot: snapshot of the principal TE component E_y.



A square 2-D microresonator

with perpendicular port waveguides, cores of thickness $t_1 = w_3 = 0.1\,\mu$m, separated by gaps $t_2 = 0.355\,\mu$m, $w_2 = 0.385\,\mu$m from the cavity of dimension $w_1 \times t_3 = 1.786\,\mu\mathrm{m}^2$, index contrast $3.4 : 1.0$; TE$_0$-excitation from the left at $\lambda = 1.55\,\mu$m, guided output power 22% (left), 46% (top), 22% (right).

133×133 spectral terms, $(x_t - x_b) \times (z_t - z_l) = 10.2 \times 10.3\,\mu\mathrm{m}^2$.

Plot: principal TE component E_y, absolute value.



7 BendS

1-D mode solver for slab waveguide bends



$\sim \exp(\mathrm{i}\omega t)$, $\partial_y = 0$, 2-D TE/TM, $x, y, z \to r, \theta, y$, $\partial_\theta n = 0$,

$\begin{pmatrix} E \\ H \end{pmatrix}(r,\theta) = \boldsymbol{\phi}(r)\,\exp(-\mathrm{i}\gamma R\theta)$, $\gamma \in \mathbb{C}$,

$\partial_r^2\phi + r^{-1}\partial_r\phi + (k^2n^2 - r^{-2}\gamma^2R^2)\phi = 0$

eigenvalue problem ⇝ γ, ϕ.

A bent slab waveguide,

SiO$_2$/Si$_3$N$_4$ layers with air cladding, index contrast $1.45 : 1.99 : 1.0$, core thickness $t_1 = 0.4\,\mu$m, bend radius $R = 7\,\mu$m (outer rim), TE waves at vacuum wavelength $\lambda = 1.55\,\mu$m.

Plots: modes of lowest radial order with effective indices $N_{\mathrm{eff}} = 1.65 - \mathrm{i}\,1.4 \cdot 10^{-13}$ (TE$_0$), $1.17 - \mathrm{i}\,2.9 \cdot 10^{-4}$ (TE$_1$), $1.02 - \mathrm{i}\,6.4 \cdot 10^{-3}$ (TE$_2$); principal electric component E_y, time snapshots.

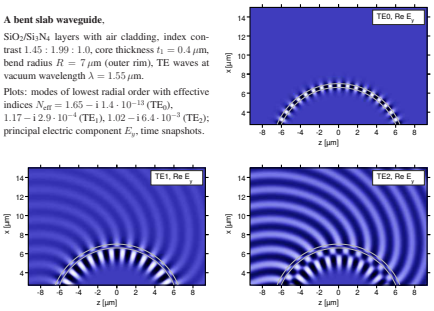

8 WGMs

Whispering gallery modes of circular 2-D dielectric optical cavities



$\partial_y = 0$, 2-D TE/TM, $x, y, z \to r, \theta, y$, $\partial_\theta n = 0$, $m \in \mathbb{Z}$,

$\begin{pmatrix} E \\ H \end{pmatrix}(r,\theta,t) = \boldsymbol{\phi}(r)\,\exp(\mathrm{i}\omega_c t - \mathrm{i}m\theta)$, $\omega_c \in \mathbb{C}$,

$\partial_r^2\phi + r^{-1}\partial_r\phi + (c^{-2}\omega_c^2n^2 - r^{-2}m^2)\phi = 0$

eigenvalue problem ⇝ ω_c, ϕ.

A dielectric disk,

refractive index contrast $1.5 : 1.0$, radius $R = 10\,\mu$m, TE waves at target vacuum wavelength $\lambda = 1.55\,\mu$m.

Plots: whispering gallery modes of specific radial and angular order, with resonance wavelength $\lambda_r = 1.548\,\mu$m and quality factor $Q = 2.3 \cdot 10^8$ (TE$_{0,55}$), $\lambda_r = 1.538\,\mu$m and $Q = 1.6 \cdot 10^2$ (TE$_{3,42}$); time snapshots of the principal E_y field and absolute value $|E_y|$, for single WGMs and for a superposition of degenerate modes TE$_{3,42}$ and TE$_{3,-42}$.

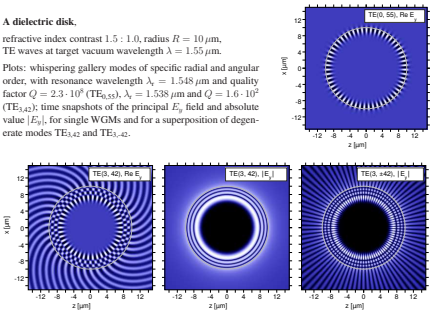

9 Technical remarks

- Browser support for HTML5 is required, JavaScript needs to be enabled, no further plugins are required.
- After accessing the pages on the SiIO website, the scripts run *locally* on the client machine; the speed depends on the respective hardware.
- No input data is being sent over the internet connection.
- The solvers generate figures as shown (svg-format; conversion e.g. via Inkscape).

References

[1] M. Hammer. Simulations in Integrated Optics, online solvers. https://www.siio.eu/ (accessed 01/2020).

[2] Emscripten, Compiling to asm.js and WebAssembly. https://emscripten.org/ (accessed 11/2019).

[3] M. Hammer. METRIC — Mode expansion tools for 2D rectangular integrated optical circuits. http://metric.computational-photonics.eu/ (accessed 01/2020).

[4] O. V. Ivanova. *Dimensionality Reduction in Computational Photonics*. University of Twente, Enschede, The Netherlands, 2010. Ph.D. Thesis.

[5] O. V. Ivanova, R. Stoffer, and M. Hammer. A variational mode solver for optical waveguides based on quasi-analytical vectorial slab mode expansion, 2013. arXiv:1307.1315v2 [physics.optics].

[6] M. Hammer. Quadridirectional eigenmode expansion scheme for 2-D modeling of wave propagation in integrated optics. *Optics Communications*, 235(4–6):285–303, 2004.

[7] K. R. Hiremath, M. Hammer, R. Stoffer, L. Prkna, and J. Čtyroký. Analytical approach to dielectric optical bent slab waveguides. *Optical and Quantum Electronics*, 37(1-3):37–61, 2005.

[8] E. F. Franchimon, K. R. Hiremath, R. Stoffer, and M. Hammer. Interaction of whispering gallery modes in integrated optical micro-ring or -disk circuits: Hybrid CMT model. *Journal of the Optical Society of America B*, 30(4):1048–1057, 2013.

Acknowledgements

Support by the Deutsche Forschungsgemeinschaft (DFG, Transregional Collaborative Research Center TRR 142, and project HA7314/1) is gratefully acknowledged.

* Manfred Hammer, Paderborn University, FG Theoretical Electrical Engineering
Warburger Straße 100, 33098 Paderborn, Germany
Phone: ++49(0)5251/60-3560, Fax: ++49(0)5251/60-3524, E-mail: manfred.hammer@uni-paderborn.de

TET

PADERBORN UNIVERSITY
The University for the Information Society